

ELEV 164

CAT A,B,C,D

OHAKEA


RWY 09 THR ELEV 150

RNAV (GNSS) RWY 09


CONTROL: 125.1 128.5 123.2 263.4

TOWER: 134.5 255.4

ATIS: 135.0 280.4

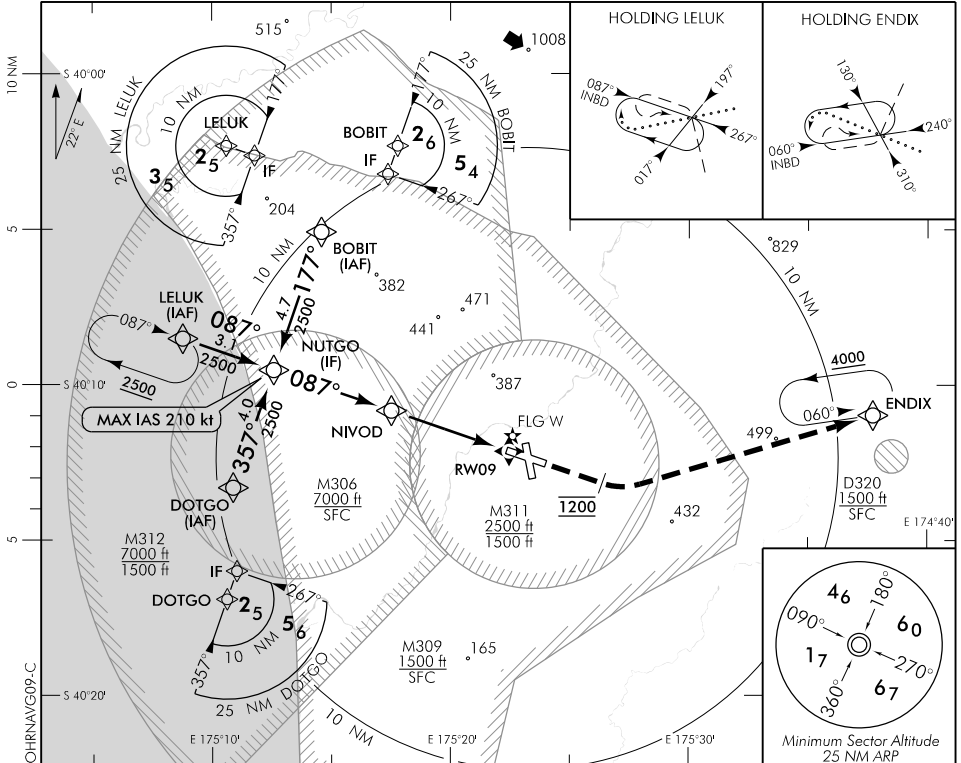

Use Ohakea QNH

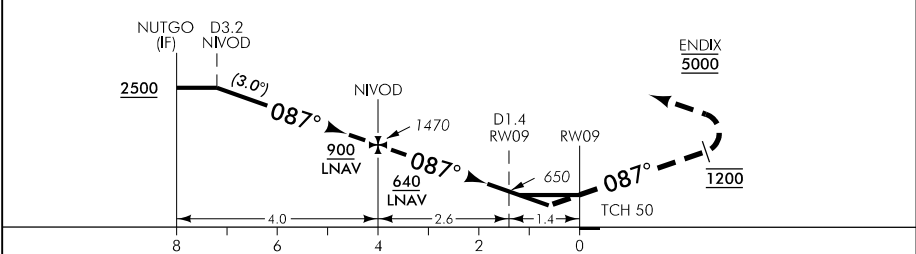

MISSED APCH: Track 087° to 1200, turn LEFT direct to ENDX 5000

DISTANCE to WPT	NUTGO	3	2	1	NIVOD	3	2	1.2	0.8	RW09
Advisory Altitude 3°	2750	2430	2110	1790	1470	1160	840	MDA	DA	MDA
Category	A			B		C		D		
LNAV/VNAV*	450(300) - 1500					470(320) - 1500				
LNAV	580(430) - 1500					580(430) - 1500				
Circling	730(566) - 1900			800(636) - 2800		1020(856) - 4000		1100(936) - 4600		

* Valid to AD temperature -5°C. Use of remote QNH NA

Effective: 30 MAR 17

Changes from 10 NOV 16: MNM SECT ALT 25 NM.

