

ELEV 1171

NZQN

TOWER: 118.1 128.9


DELIVERY: 121.9

ATIS: 126.4

UNATTENDED: 118.1

# QUEENSTOWN

## GROUND MOVEMENTS (1)

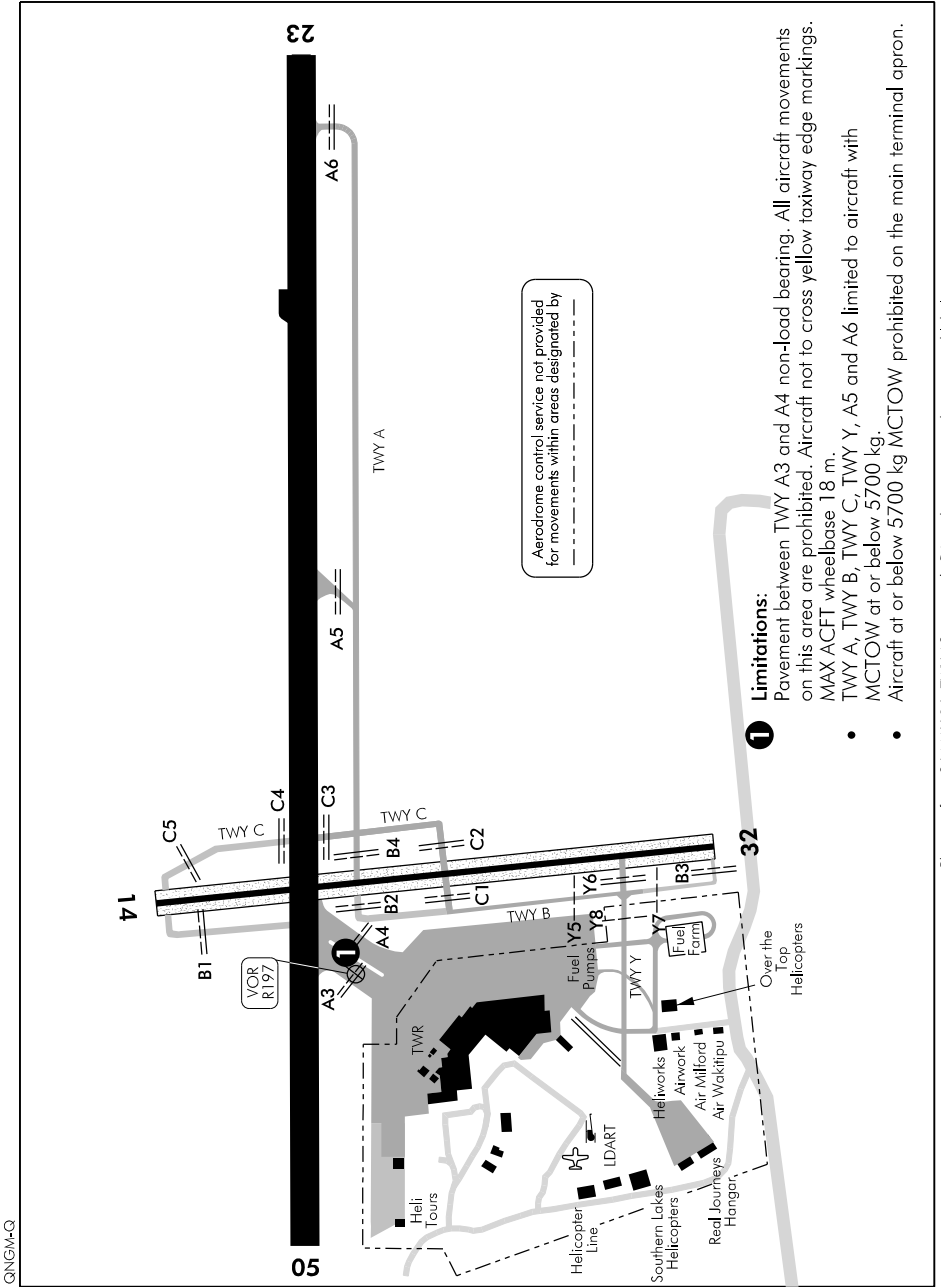

**1 Limitations:**

- Pavement between TWY A3 and A4 non-load bearing. All aircraft movements on this area are prohibited. Aircraft not to cross yellow taxiway edge markings.
- MAX ACFT wheelbase 18 m.
- TWY A, TWY B, TWY C, TWY Y, A5 and A6 limited to aircraft with MCTOW at or below 5700 kg.
- Aircraft at or below 5700 kg MCTOW prohibited on the main terminal apron.

Changes from 26 MAY 16: TWY A2 removed, GA parking, operator hangars and labeling.

QINGM-Q

**Effective: 2 FEB 17**

ELEV 1171

NZQN

TOWER: 118.1 128.9


DELIVERY: 121.9

ATIS: 126.4

UNATTENDED: 118.1

# QUEENSTOWN

## GROUND MOVEMENTS (2)

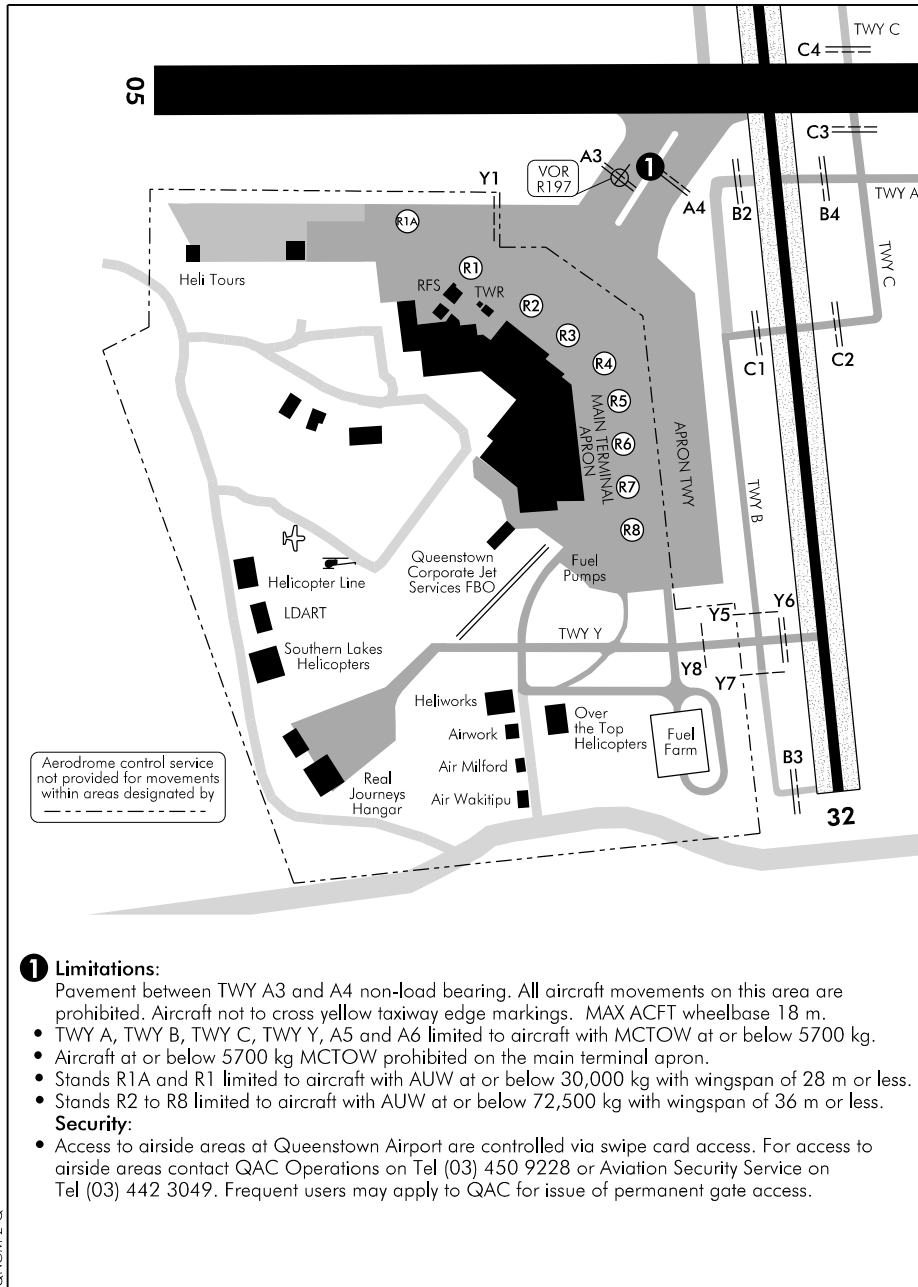

Changes from 26 MAY 16: TWY A2 removed, GA parking, operator hangars and labelling.

**1 Limitations:**

Pavement between TWY A3 and A4 non-load bearing. All aircraft movements on this area are prohibited. Aircraft not to cross yellow taxiway edge markings. MAX ACFT wheelbase 18 m.

- TWY A, TWY B, TWY C, TWY Y, A5 and A6 limited to aircraft with MCTOW at or below 5700 kg.
- Aircraft at or below 5700 kg MCTOW prohibited on the main terminal apron.
- Stands R1A and R1 limited to aircraft with AUW at or below 30,000 kg with wingspan of 28 m or less.
- Stands R2 to R8 limited to aircraft with AUW at or below 72,500 kg with wingspan of 36 m or less.

**Security:**

Access to airside areas at Queenstown Airport are controlled via swipe card access. For access to airside areas contact QAC Operations on Tel (03) 450 9228 or Aviation Security Service on Tel (03) 442 3049. Frequent users may apply to QAC for issue of permanent gate access.

QINGM-2-Q